ML-2011 Microphone Lift

FEATURES & BENEFITS

The ML-2011 microphone lift provides a high-tech audio solution to any boardroom. In large-venue applications, the ML-2011 eliminates the clutter of stands and cables.

- Up to 25 feet of lowering distance
- Install above or below finished ceiling
- Plenum design with integrated junction boxes
- Quiet, smooth operation
- Easy-to-program microphone position
- Self contained unit - contact closure operation
- Star Quad cable for reduced noise
- Programmable "ramping" - No abrupt starting/ stopping
- Easy installation with ceiling mount plate
- No charge for microphone integration
- Includes hard-wired handheld remote

(*Does not include microphone)*

ML- 2011: 15.0"w x 6.6"d x 15.6"h 26 lbs.

(Dimensions do not include microphone)

ML- 2011

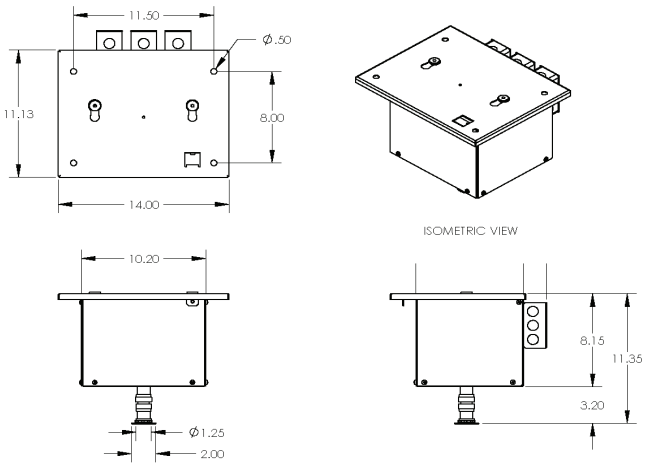

Metric conversion: inches x 25.4

DRAWINGS & SPECIFICATIONS

- Maximum lowering distance:
  ML- 2011 - 25 feet
- Power Requirements: 110V, .75 amp; 22 0V, .5 amp
- Steel with paintable galvanized finish
- Ceiling bezel: clear anodized aluminum
- XLR-F audio connection
- 7/8" concealed microphone housing
  - optional 1.5" extensions for long mics
- Beige or black microphone cable
- Capacity: minimum 4 oz., maximum 6.5 oz.
- Programmable lowering position
- Programmable speed ramping distance
- Smooth DC motor - provides deceleration
- 1 year warranty

www.DisplayDevices.com
sales@DisplayDevices.com
DISPLAY DEVICES
Design • Engineering • Manufacturing
Phone: 877-862-6865
Fax: 303-412-9346